

BODY BUILDER'S BOOK BULLETIN

DATE: June 5, 2008
MODEL YEAR: 2008 ~ Later
CHASSIS MODEL: ALL
BULLETIN NUMBER: BBB Bulletin-19


MINIMUM CLEARANCES FOR THE DIESEL PARTICULATE FILTER (DPF)

PURPOSE

The listed clearances should be followed when installing aftermarket equipment near the Diesel Particulate Filter (DPF).

ADVISORY

- Flammable objects (rubber, wood, plastics, etc.) must have a clearance of at least 4 inches from the DPF.
- Electrical wiring must have a clearance of at least 8 inches from the DPF.
- If any of the above specified clearances are not provided, the affected area **must** be insulated with a metal shield or heat insulator.
- Observe the following schematic below to prevent damage to vehicle and/or aftermarket installed components.

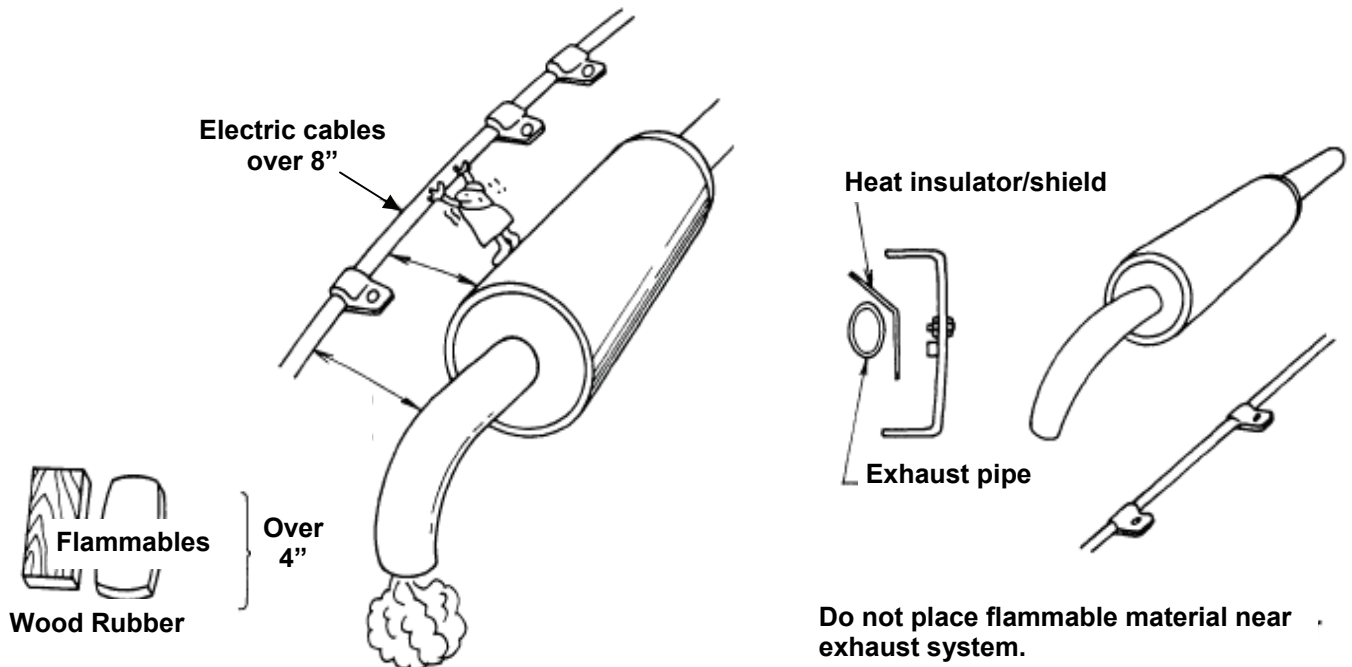

Important: No flammable materials or objects should be installed or placed near the exhaust system or the outlet of the exhaust pipe.

THE INFORMATION CONTAINED IN THIS BULLETIN SHOULD NOT BE INTERPRETED AS THE BASIS FOR WARRANTY CLAIMS UNLESS SO DESIGNATED